



Mamba 24L

Technical specification

Outdoor light with incorporated electronic gear for LED. High quality glass lenses with several different beam spreads.

Lamp housing of die-cast aluminum for optimal stability and low weight.

NL Power electronic LED gear integrated in fixture aluminum housing for optimal LED life, light flow and color performance.

No need for tools when changing the light source and gear.

Adjustable bracket between 0°-135 degrees for 60mm light poles.



Model and colors Grey

Accessories Adapter for 40mm poles.

Area of use Outdoor street and road applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	5,2 kg
Form of protection	IP 66, class I
Color temperature	3 000 or 4 000 K
Light source	LED
Operating position	85dgr + 95dgr
Control gear	Electronic
Start time	Instant
Driver	Built in
Safety glass	Included
Optics	30x140, 30x155

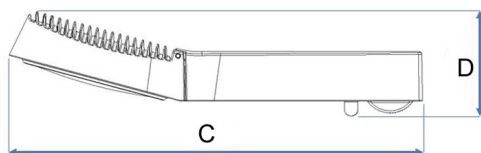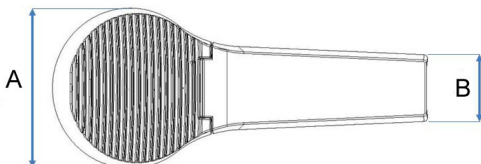

A 250 B 105 C 582 D 147 (mm)

Art no	Description	Color
145-504-30	MAMBA LED 30x140deg	Grey
145-508-30	MAMBA LED 30x155deg	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI ³
740	3850	57	A

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.