



Mamba Mini 8L

Technical specification

Outdoor Led light with incorporated electronic gear. Cylindrical reflector with lens spread 30x140. Safety glass required.

Yoke, lamp and gear housing are made in die-cast aluminum.

NL power electronic ballast integrated in fixture, aluminium housing for optimal cooling, light flow and color performance. No need for tools when changing the light source and gear. Adjustable bracket between 0-135 degrees for 60mm light poles.


Model and colors Available in grey and other colours on request.

Accessories On request, elumdat files of the different lenses are provided.

Area of use Outdoor, arena and industrial use.

Technical data

Mains (input) voltage	220-240 V
Total weight	3,5 kg
Form of protection	IP 66, class I
Color temperature	4 000 K
Light source	LED
Operating position	Universal
Control gear	Electronic
Start time	Instant
Driver	Built in
Safety glass	Included
Optics	30x140 dgr




Art no	Description	Color
216-500-30	30x140 dgr	Grey

Type	Delivered lumen output (lm)	System power (W)	EEI ³
740	1240	19,5	A

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Product is still under construction, please check with Nordic Light for latest update.

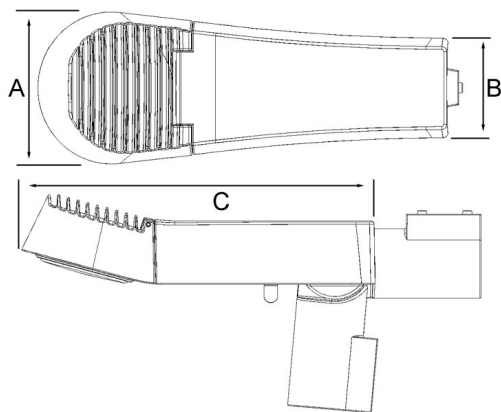

A 145 B 95 C 390 (mm)